



LSRC-6RFR5CCT / LSRC-6SFR5CCT

6" 2-Hour Fire Rated Can-less 5CCT Recessed LED Downlight

LUMENS: 840lm

COLOR TEMPERATURE: Selectable 5CCT

APERTURE: Round & Square



CCT Switch



Description This 6" 2-Hour Fire Rated ultra slim profile can-less recessed LED downlights are designed for easy installation into new construction or remodel applications. Tunable white luminaires include an integral Selectable CCT switch located on the junction box of each luminaire with a quick connect that allows for easy disconnect and mounting in the ceiling.

FEATURES

- 840lm/12W
- Super thin - Fit in 1" to 2" clearance
- Field selectable CCT: 2700K / 3000K / 3500K / 4000K / 5000K
- Triac dimming
- No housing required and includes pre-wired junction box
- Junction box includes tunable color temperature switch
- Quick disconnect allows for easy installation
- IC Air-tight rated
- ETL approved, RoHS compliant




PRODUCT IMAGES & DIMENSIONS



LSRC-6RFR5CCT
6" Round



LSRC-6SFR5CCT
6" Square

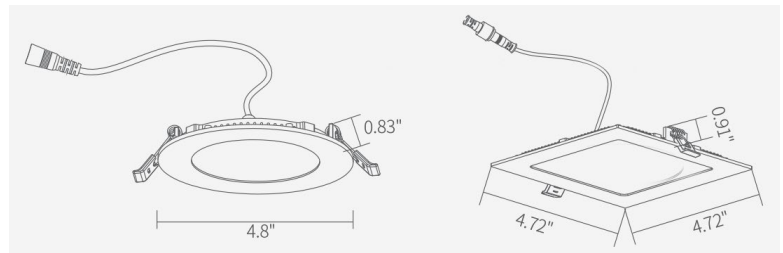

SPECIFICATIONS

Catalog Number	Size	Voltage	Wattage	Lumen	CCT	CRI	Life Time
LSRC-6RFR5CCT	6"	120VAC	12W	840lm	27K/30K/35K/40K/50K	80	50,000Hrs.
LSRC-6SFR5CCT	6"	120VAC	12W	840lm	27K/30K/35K/40K/50K	80	50,000Hrs.