



Project _____ Catalog # _____

LSRE-T35RB5CT & LSRE-T35RS5CT

3.5" LED Baffle & Smooth Reflector Retrofit Downlight

LUMENS: 630-650lm

COLOR TEMPERATURE: Selectable 5CCT

APERTURE: Round

Description 3.5" LED open reflector retrofit downlight is compatible with most 3.5" standard recessed new construction and remodel housings.

FEATURES

- 630-650lm / 10W
- Selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K @ 90+ CRI
- Black or White finishes
- Die-cast aluminum heatsink dissipates heat from LED board
- 3 Tension clips pre-installed on unit for easy installation
- Dimming down to 10% with most dimmers
- Certified to the high efficacy requirements of California JA8 Title 24
- cULus listed
- ENERGY STAR Certified
- RoHS compliances
- Tested in accordance with IESNA LM79 & LM80



PRODUCT IMAGES & DIMENSIONS



LSRE-T35RB5CTBK
3.5" Baffle Reflector,
Black finish




LSRE-T35RB5CTWH
3.5" Baffle Reflector,
White finish



LSRE-T35RS5CTBK
3.5" Smooth Reflector,
Black finish



LSRE-T35RS5CTWH
3.5" Smooth Reflector,
White finish

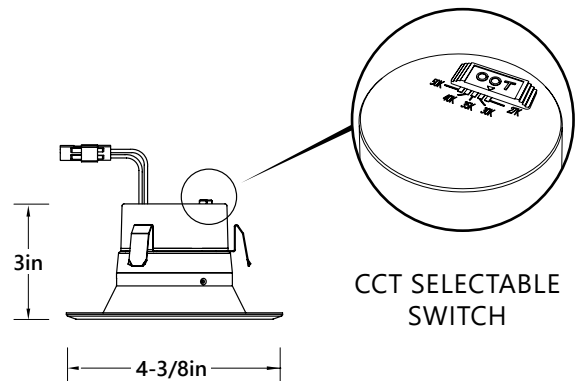

SPECIFICATIONS

Catalog Number	Size	Type/Finish	Selectable CCT / Lumen	CRI	Certificated
LSRE-T35RB5CTBK	3.5"	Baffle/Black	27K/630lm; 30K/640lm; 35K/650lm; 40K/650lm; 50K/650lm	90+	cULus
LSRE-T35RB5CTWH	3.5"	Baffle/White	27K/630lm; 30K/640lm; 35K/650lm; 40K/650lm; 50K/650lm	90+	cULus
LSRE-T35RS5CTBK	3.5"	Smooth/Black	27K/630lm; 30K/640lm; 35K/650lm; 40K/650lm; 50K/650lm	90+	cULus
LSRE-T35RS5CTWH	3.5"	Smooth/White	27K/630lm; 30K/640lm; 35K/650lm; 40K/650lm; 50K/650lm	90+	cULus